


Features

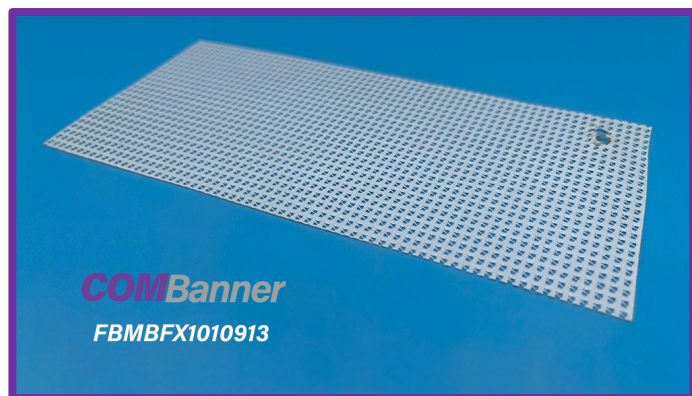

Transmittance Rate 39.5%; Airflow Through Rate 2945mm/s
 PVC coated high tenacity polyester scrim 1000D*1000D
 PVC Liner 100gsm included is also available which prevents ink spray through when printing
 Offer enhanced image compared to traditional meshes

Technical Data Sheet

Item Code		FBMBFX1010913	Test Method
Base Fabric		1000D*1000D 9*13	DIN EN ISO2060
Total Weight (GSM)		350	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	1100	ISO527/3:1995
	Weft (N/5cm)	1300	ISO527/3:1995
Tear Strength	Warp (N/5cm)	300	ISO4674/1:2003
	Weft (N/5cm)	280	ISO4674/1:2003
Transmittance Rate		39.5%	
Airflow Through Rate		2945mm/s	
Temperature		-30°C/+70°C	ISO13934-1:1999
Flame Retardant		B1/M1/M2/NFPA701	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

Ink Printability

SOLVENT	ECO-SOLVENT	UV	LATEX	SCREEN PRINTING
■	■	■	■	■



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
 Haining, Zhejiang, China
 Tel: +86-573-80776996 Fax: +86-573-80776998
 Mob/Skype/Wechat: +86-15858322153
 Email: contact@hncomax.com jeff@hncomax.com

